


# Tine Installation

Tines are supplied in the carton. (25 Core Tines, 25 Slitter Slicer, or 15 Fracture Tines). These are attached to the 5 disc reel as follows:

1. Attach the tines to the reel using the bolts and nuts provided - check direction of tines and tighten securely. The open side of the core tine faces toward the back of the machine when in the ground.

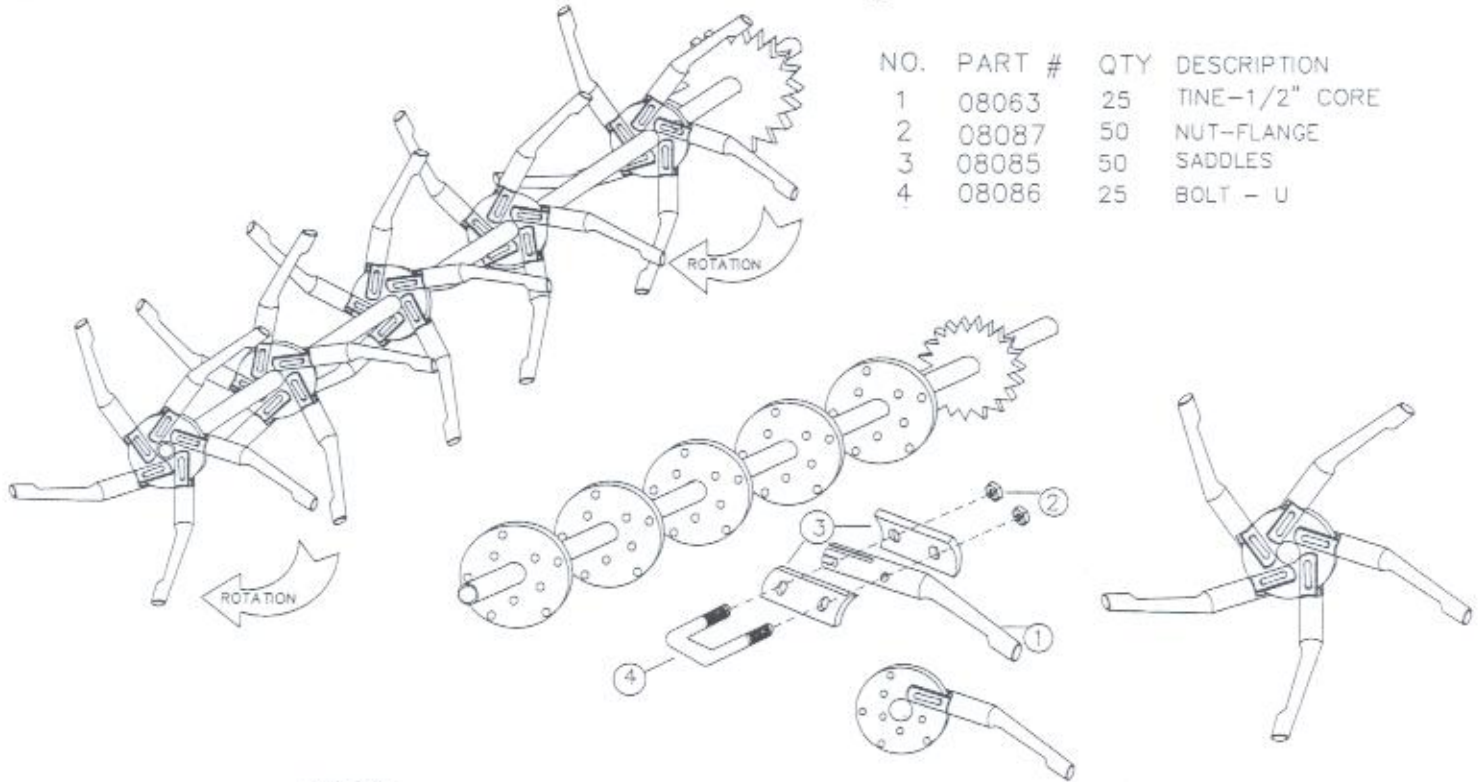


NO.	PART #	QTY	DESCRIPTION
1	08063	25	TINE-1/2" CORE
2	08087	50	NUT-FLANGE
3	08085	50	SADDLES
4	08086	25	BOLT - U

IMPORTANT!  
BLADES TO BE MOUNTED  
IN DIRECTION SHOWN.



2 REEL DISCS REQ.  
PER PLATE  
P/N # 08094

5 BLADES REQ.  
PER PLATE  
P/N # 08067

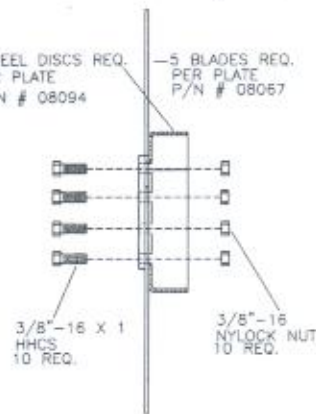

NOTE: BLADES ARE TO BE MOUNTED  
IN BETWEEN SITTER DISCS  
AND REEL ASSEMBLY PLATES ON SHAFT.

